

PRODUCT COMPARISON CHART

Waste Management



Product Name	Bin Tag	Bin Tag HDX	Bin Tag HF	Bin Tag UHF	Plug Tag	InLine Ultra (Weld)	InLine Ultra Slim (Weld)	IN Tag 200/300/500	IN Tag 500 UHF	IN Tag 500 UHF (OM)		
Application	For integration into waste management collection bins during or after molding				Easy-mounting, non-removable tag for tracking containers for hazardous, recycling, medical and sensitive waste	Robust high performance, general purpose UHF transponder for metal and non metal outdoor use		Ruggedized for severe industrial environments, food compatible	Highly robust screw-on tag with anti collision support and on-metal option up to 140°			
Frequency	125 kHz	134.2 kHz	13.56 MHz	860-960 MHz (Worldwide)	131 kHz	134.2 kHz	860 - 960 MHz (Worldwide)	125 kHz	13.56 MHz	865 MHz (EU) / 915 MHz (US)		
Size	Ø30x15 mm				Ø9x19mm (Cap Ø15x19 mm)		97x27x15 mm (Ultra) 105x35x15 mm (Ultra weld)	97x27x9 mm (Ultra) 105x35x9 mm (Ultra weld)	Ø20 or 30x2.5 mm, Ø50x3 mm	Ø50x3.5 mm	Ø55x13 mm	
Screw hole	N/A		Ø5.5 mm	N/A	N/A		Ø5.2 mm or optional steel ring to weld	None (IN Tag 200) or Ø5.2mm		Ø5.3 mm		
Standards / Protocol Support	DIN30745	EN 14803, DIN 30745		ISO 15693, ISO 18000-3	EPC C1G2, ISO 18000-6C, DIN30745	N/A	EN 14803	ISO 18000-6C, EPC C1G2, ISO 17364, DIN 40050-9	N/A	ISO 15693, ISO 18000-3	ISO 18000-6C, EPC C1G2	
Chip Type	Unique	FDX-b BDE	HDX BDE	I-Code SLix	Higgs 3	Unique	FDX-b BDE	Monza 4QT	Hitag S, Unique	I-Code SLix	G2XM	
Memory ²	64 bit RO	128 bit RO	128 bit RO	1024 bit RW	96 bit EPC, 64 bit TID, 512 bit RW	64 bit RO	128 bit RO	96 bit TID, 128 bit EPC, 512 bit RW	64 bit RO, 256 bit RW, 2048 bit RW	1024 bit RW	240 bit EPC, 64 bit TID, 512 bit RW	
Anti-collision	N/A	N/A	Yes		N/A		Yes		Hitag S - Yes	Yes	Yes	
Reading Distance ¹	N/A	N/A	N/A	Up to 6.5ft / 2m	N/A		Up to 26.2 ft (8 m)	Up to 16.4 ft (5 m)	N/A		Up to 9.8 ft / 3 m	
Typical Use Environment	Plastic				Plastic		Metal, plastic, wood, glass		Plastic, wood, glass		Plastic, wood	Metal, plastic
Mounting Method	Screw-in			N/A	Plug-in		Screw-on or weld		Embed, glue or screw-on		Screw-on	
Operating Temperature ¹	-40 °C to +85 °C	-25 °C to +70 °C	-25°C to +85°C	-40 °C to +70 °C	-20 °C to +85 °C		-40°C to +80°C	-25°C to +85°C	-40°C to +85°C	-20 °C to +85 °C		
Storage Temperature ¹	-40 °C to +90 °C	-40 °C to +85 °C	-40°C to +90°C	-40 °C to +70 °C	-20 °C to +85 °C		-40°C to +80°C	-40°C to +85°C		-40 °C to +90 °C		
Peak Temperature ¹	N/A	N/A	N/A	N/A	N/A		Shock -40° to +85°	+140 °C (100h)		+140 °C (100h)		
Housing Material	Housing PA6, potting - PUR				PA6		PC-ABS		PPA		PPA	
Chemical and Environmental Resistances ¹	Water, IP67 (1m, 1 h), salt mist, fuel B, petroleum, mineral and vegetable oils				Water, IP 68 (1m, 24 h)		Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, petroleum, oils, humidity 70%/80%	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt mist, Fuel B, petroleum, mineral and vegetable oils, food compatible, flame resistant UL94 HB	Water, IIP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt mist, Fuel B, petroleum, mineral and vegetable oils, food compatible		Water, IIP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt mist, Fuel B, petroleum, mineral and vegetable oils, food compatible	
Mechanical Resistances ¹	Vibration IEC 68.2.6, shock IEC 68.2.29, compression 1000N				Vibration IEC 68.2.6, shock IEC 68.2.29		Vibration IEC 68.2.6, shock IEC 68.2.29, Impact IEC 62262-IK09	Vibration IEC 68.2.6, shock IEC 68.2.29	Vibration IEC 68.2.6, shock IEC 68.2.29		Vibration IEC 68.2.6, shock IEC 68.2.29	
Axial / Radial Force ¹	1000N (10 sec)				N/A		1000N	800N / 500N (10 sec)		800N / 500N (10 sec)		
Warranty ³	7 years				7 years		7 years	7 years		7 years		

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2015-03-30-ldt-tag-products-ct-en-PLT-00649

¹ For further specification details, please see datasheets of the respective products. Read range is strongly dependent upon multiple parameters including reader, environment and application. HID Global tags are tested and proven to be at the top of their class.

² Unique (64 bit RO), Q5 (264 bit RW), Hitag S (32 bit RO, 256 bit RW, 2048 bit RW), I-Code SLix (1024 bit EEPROM, incl. 896 bit user memory)

³ Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to + 50°C, humidity 20% to 80%

PRODUCT COMPARISON CHART

Animal Identification



Product Name	Glass Tag Ultra	Glass Tags							E-Unit Rod	E-Unit Disc	
Application	Glass tube with up to 35% better read range than standard tube of same size	Small size with high chemical resistance provides an ideal solution for injection and long term immersion							Embeddable RFID tags - ideal as customizable implants. Please contact HID sales for details.		
Size	Ø2x9 mm ³ , Ø2x12.5 mm ³	1.4x8 mm ³	1.4x10 mm ³	Ø2x12 mm ³	Ø2x12 mm	Ø3x15 mm	Ø3.85x22.5 mm, Ø3.85x32 mm	Ø4x22 mm	Ø4x34 mm	Ø1x7 mm	Ø 20, 24, 27, 28 mm or custom
Frequency	134.2 kHz			125 kHz	134.2 kHz				134.2 kHz		
Standards / Protocol Support	ISO 11784, ISO 11785			N/A	ISO 11784, ISO 11785				ISO 11784, ISO 11785		
Chip Type	EM4305	Hitag S, EM4305		Unique	Hitag S	HDX	Hitag S, EM4305		EM4305	Hitag S, EM4305	
Memory ¹	512 bit RW	256 bit RW, 512 bit RW, 2048 bit RW		64 bit RO	256 bit RW	128 bit OTP	256 bit RW, 512 bit RW		512 bit RW	256 bit RW, 512 bit RW	
Tagging Method	Subcutaneous			External housing e.g. pigeon ring	Subcutaneous, primarily horses	External housing		External housing e.g. ceramic bolus (stomach)	Ear tag or customized implant	Ear tag	
Operating Temperature ²				-25 °C to +85 °C						-25 °C to + 60 °C	
Storage Temperature ²				-40 °C to +90 °C						-40 °C to + 60 °C	
Peak Temperature ²				+120 °C (100h) +140 °C (10h)	+120 °C (100h)	+120 °C (100h) +140 °C (10h)				N/A	
Housing Material				BIO Glass						N/A	
Chemical and Environmental Resistances ²				Water, IP68 (1m, 24h), saltwater, alcohol, HCL, fuel, ammonia						Depends on finished product	
Mechanical Resistances ²				Vibration IEC 68.2.6, shock IEC 68.2.29						N/A	
Parylene Coating Available (better tissue adhesion)	Yes			No	Yes	No				N/A	
Warranty ⁴				2 years						2 years	

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.



© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

1 For further specification details, please see datasheets of the respective products.
2 Hitag S (256 bit RW), EM4305 (512 bit RW)
3 Optionally available with on-demand custom programming, see <http://www.hidglobal.com/main/services/on-demand/pet-programming/>

4 Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to + 50°C, humidity 20% to 80%
For unpackaged tags: Warranty would depend on finished product and can only be given as long as raw product is not processed / packaged

PRODUCT COMPARISON CHART

Automation & Manufacturing

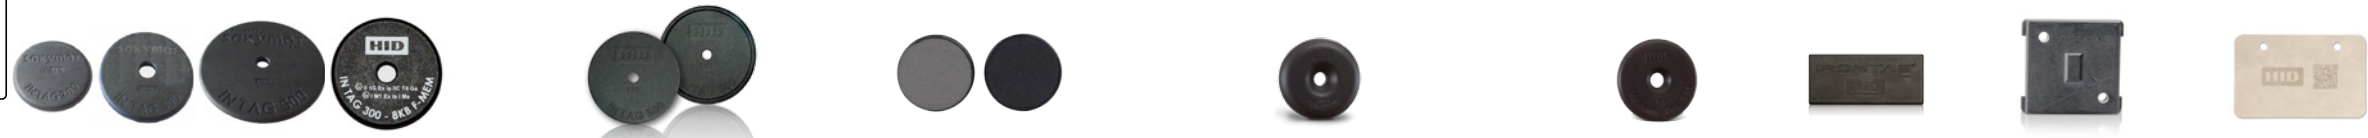

Product Name	IN Tag 200/300/500		IN Tag 500 UHF	IN Tag 500 UHF (OM)	Logi Tag 121 OM	Poly Tag 340			Volcano Tag 231	Iron Tag 176	Iron Tag 206	High-Temp. Label
Application	Ruggedized for severe industrial environments, food compatible		Highly robust screw-on tag with anti collision support and on-metal option up to 140°		Micro-sized and thin, high performance HF disc tag with on-metal option	Durable tag for outdoor use requiring extreme impact resistance			Tag to withstand high temperatures	On-metal, High Temperature UHF Tag		High-temperature UHF label for manufacturing processes
Frequency	125 kHz	13.56 MHz	865 MHz (EU) / 915 MHz (US)		13.56 MHz	125 kHz	13.56 MHz		125 kHz	865 MHz (EU) / 915 MHz (US)		860-960 MHz (Worldwide)
Size	Ø20 or 30x2.5 mm, Ø50x3 mm		Ø50x3.5 mm	Ø55x13 mm	Ø12.4x2.15 mm	Ø34x8 mm			Ø26x4 mm	53x23x7 mm	34x31x6 mm	80x50x0.5 mm
Screw Hole	None (IN Tag 200) or Ø5.2mm		Ø5.3 mm		N/A	Ø5.4 mm			Ø4.5 mm	N/A	Ø3.3 mm	Ø5 mm
Standards / Protocol Support ¹	ISO 15693, ISO 18000-3		ISO 15693		ISO 18000-6C, EPC C1G2	ISO 15693, ISO 18000-3, ATEX			N/A	EPC C1G2, ISO 18000-6C, DIN 40050-9, ISO 4892-2		EPC C1G2, ISO 18000-6C
Chip Type	Hitag S, Unique	I-Code SLiX	F-Mem		G2XM	Vigo			Unique, Q5	Higgs 3	Monza X	Monza 4QT
Memory ³	64 bit RO, 256 bit RW, 2048 bit RW	1024 bit RW	2 KByte RW, 8 KByte RW (IN Tag 300 only)		240 bit EPC, 64 bit TID, 512 bit RW	1024 bit RW			64 bit RO, 264 bit RW	64 bit TID, 96 bit EPC, 512 bit RW	96 bit TID, 128 bit EPC, 2176 or 8192 bit RW	96 bit TID, 128 bit EPC, 512 bit RW
Anti-collision	Hitag S - Yes	Yes	Yes		Yes	Yes			No	Yes		Yes
Reading Distance ¹	N/A		N/A		Up to 9.8 ft / 3 m	N/A			N/A	Up to 13.1 ft (4 m)	up to 8.2 ft (2.5 m)	up to 26.3 ft (8 m)
Typical Use Environment	Plastic, wood, glass		Plastic, wood	Metal, plastic, wood	Metal, Plastic	Plastic, wood			Any to withstand equal temperatures	Metal		manufacturing
Mounting Method	Embed, glue or screw-on		Screw-on		Embed, glue	Screw-on			Screw-on	Glue or sticker	Screw, clamp, glue or sticker	screw, rivet
Operating Temperature ¹	-25°C to +85°C	-40°C to +85°C		N/A	-40°C to +85°C	-40 °C to +85 °C	-25 °C to +85°C	-40°C to +85°C	-25 °C to +85 °C	-40°C to +85°C		-40°C to +85°C
Storage Temperature ¹	-40 °C to +90 °C		-40 °C to +90 °C		-40°C to +90°C	-40 °C to +90 °C	-40 °C to +90°C		-25 °C to +140 °C	-40°C to +90°C		-40°C to +85°C
Peak Temperature ¹	+140 °C (100h)		+140 °C (100h)		+90 °C (100h)	+100 °C (100h)	+130 °C (100h)		+160 °C (100h) +200 °C (10min)	+180°C (400h)	+180° C (600h), +200° C (24h), +220° C (10h)	+140°C (400h), +180°C (100h), +230°C (20h)
Housing Material	PPA		PPA		PPS	PA6			PPA	PPA		Aramid Polymer
Chemical and Environmental Resistances ¹	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, fuel B, petroleum, mineral and vegetable oils, food compatible, flame resistant UL94 HB		Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, fuel B, petroleum, mineral and vegetable oils, food compatible, flame resistant UL94 HB		Water, IP68 (1m, 24h), Salt mist, Fuel B, Petroleum, Mineral and vegetable oils, Food compatible	Water, IP67 (1m, 1h), water with salt, unleaded gasoline, petroleum, mineral and vegetable oils, humidity 90% HR @ 90 °C			Water, IP68 (1m, 24h)	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, fuel B, mineral and vegetable oils, petroleum, food compatible, flame (UL94HB) and UV resistant	Water, IP67 (1m, 1h), Salt mist, Fuel B, Mineral and vegetable oils, Petroleum, Flame (UL94V0) and UV resistant	Water, IP68 (1m, 24h), Salt mist, Fuel B, Petroleum, Mineral and vegetable oils, Flame resistant UL 94V-0
Mechanical Resistances ¹	Vibration IEC 68.2.6, shock IEC 68.2.29		Vibration IEC 68.2.6, shock IEC 68.2.29		Vibration IEC 68.2.6, Shock IEC 68.2.29	Vibration IEC 68.2.6, shock IEC 68.2.29			Vibration IEC 68.2.6, shock IEC 68.2.29	Vibration IEC 68.2.6, Shock IEC 68.2.29, Impact IEC 62262-IK07		Vibration IEC 68.2.6, Shock IEC 68.2.29, Bending: 100x 300mm radius, 10x 100 mm radius - lengthwise
Axial / Radial Force ¹	800N / 500N (10 sec)		800N / 500N (10 sec)		800N / 500N (10 sec)	800N / 500N (10 sec)			N/A	800N / 500N (10 sec)		50N
Warranty ⁴	7 years		7 years		2 years	2 years			2 years	2 years		

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

¹ For further specification details, please see datasheets of the respective products. Read range is strongly dependent upon multiple parameters including reader, environment and application. HID Global tags are tested and proven to be at the top of their class.
² ISO 11784, ISO 11785 for Hitag S and EM4305 chip only

³ Unique (64 bit RO), Q5 (264 bit RW), Hitag S (32 bit RO, 256 bit RW, 2048 bit RW), Titan (1024 bit RW), EM4305 (512 bit RW) I-Code SLiX-L (512 bit EEPROM, incl. 256 bit user memory), I-Code SLiX (1024 bit EEPROM, incl. 896 bit user memory), I-Code SLiX-S (2048 bit EEPROM, incl. 1280 bit user memory), Vigo (1024 bit RW)
⁴ Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to +50°C, humidity 20% to 80%

PRODUCT COMPARISON CHART

Returnable Transport Items



Product Name	SlimFlex Square	InLine Tag Plate	Keg Tag UHF	InLine Ultra Curve	Keg Tag LF	Nail Tag	IN Tag 200/300/500		IN Tag 500 UHF	IN Tag 500 UHF (OM)
Application	Flexible, UHF tag for pallet tagging. May be laser engraved with human readable information or barcode	Thin, rigid UHF tag for container tagging with room for inscriptions via Laser engraving or labels	Robust high performance transponder for curved metallic returnable transport items like beer kegs, gas cylinders etc.		Tag especially designed for kegs with optional metallic ring	Glass-fiber nail tag for easy insertion into wood for use in pallet identification	Ruggedized for severe industrial environments, food compatible		Highly robust screw-on tag with anti collision support and on-metal option up to 140°	
Frequency	860-960 MHz (Worldwide)	865 MHz (EU) / 915 MHz (US) on-metal, broadband off-metal	865 MHz (EU) / 915 MHz (US)	860-960 MHz (Worldwide)	125 kHz	125 kHz	125 kHz	13.56 MHz	865 MHz (EU) / 915 MHz (US)	
Size	85x115x3 mm	120x68x3.7 mm	33x40x8.7 mm	88x37x14.5 mm (including metal ring)	Ø33.6x12.9 mm, Ø43.6x12.9 mm (including metal ring)	Ø4x35.5 mm	Ø20 or 30x2.5 mm, Ø50x3 mm		Ø50x3.5 mm	Ø55x13 mm
Screw hole	Ø3 mm	Ø4.2 mm	Curve radius: 75 mm	Curve radius: 450 mm	N/A	N/A	None (IN Tag 200) or Ø5.2mm		Ø5.3 mm	
Standards / Protocol Support	ISO 18000-6C, EPC C1G2, ISO 17364		ISO 18000-6C, EPC C1G2, ISO 17364, DIN 40050-9		ISO 17364			ISO 15693, ISO 18000-3, ISO 17364	ISO 18000-6C, EPC C1G2, ISO 17364	
Chip type	Higgs 3	Monza 3 (EU), Monza 4E (US)	Monza 4E	Monza 4QT	Hitag S	Unique	Hitag S, Unique	I-Code SLix	G2XM	
Memory³	64 bit TID, 96 bit EPC, 512 bit RW	64 bit TID, 96 bit EPC or 96 bit TID, 496 bit EPC, 128 bit RW	96 bit TID, 496 bit EPC, 128 bit RW	96 bit TID, 128 bit EPC, 512 bit RW	256 bit RW, 2048 bit RW	64 bit RO	64 bit RO, 256 bit RW, 2048 bit RW	1024 bit RW	240 bit EPC, 64 bit TID, 512 bit RW	
Anti-collision	Yes		Yes		Yes	N/A	Hitag S - Yes	Yes	Yes	
Reading distance²	Up to 26.2 ft (8 m)	Up to 19.7 ft (6 m) on-metal, up to 24.6 ft (7.5 m) off-metal	up to 19,6 ft (6 m)	up to 26.2 ft (8 m)	N/A	N/A	N/A		Up to 9.8 ft / 3 m	
Typical use environment	Plastic, Wood	Container tagging	Metal Kegs, Drums, Gas Cylinders etc.		Kegs e.g. beer	Wood	Plastic, wood, glass		Plastic, wood	Metal, plastic, wood
Mounting method	Glue or Screw-on	screw	Glue	Weld on metal, glue	Weld on metal, glue	Nail	Embed, glue or screw-on		Screw-on	
Operating Temperature¹	-40°C to +70°C	-40°C to +85°C	-40°C to +80°C		-25 °C to +85 °C	-25 °C to +85 °C	-25°C to +85°C	-40°C to +85°C	-20 °C to +85 °C	
Storage Temperature¹	-40°C to +70°C	-40°C to +85°C	-40°C to +80°C		-40 °C to +85 °C	-25 °C to +85 °C	-40 °C to +90 °C		-40 °C to +90 °C	
Peak Temperature¹	Shock -40 to +70°	Shock -40° to +85°	Shock -40° to +85°		N/A	N/A	+140 °C (100h)		+140 °C (100h)	
Housing Material	TPE	ABS/PC	PC-ABS		ABS / Steel	PPA	PPA		PPA	
Chemical and Environmental Resistances¹	Water, IP68 (1m, 24h), salt mist, petroleum, mineral and vegetable oils, UV resistant, food compatible	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt Mist, Petroleum, Oils,	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt Mist, Petroleum, Oils, Humidity 70°/80%		Water, IP67 (1m, 1h)	Water, IP67 (1m, 1h)	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, fuel B, petroleum, mineral and vegetable oils, food compatible, flame resistant UL94 HB		Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, fuel B, petroleum, mineral and vegetable oils, food compatible, flame resistant UL94 HB	
Mechanical Resistances¹	Vibration IEC 68.2.6, Shock IEC 68.2.29, Impact IEC 62262-IK06		Vibration IEC 68.2.6, shock IEC 68.2.29, impact IEC 62262-IK08		N/A	N/A	Vibration IEC 68.2.6, shock IEC 68.2.29		Vibration IEC 68.2.6, shock IEC 68.2.29	
Axial / Radial Force¹	1000N	500N	1000N		N/A	N/A	800N / 500N (10 sec)		800N / 500N (10 sec)	
Warranty⁴	2 Years		2 years		2 years	2 years	7 years		7 years	

² Read range is strongly dependent upon multiple parameters including reader, environment and application. HID Global tags are tested and proven to be at the top of their class.

³ I-Code SLix-L (512 bit EEPROM, incl. 256 bit user memory), I-Code SLix (1024 bit EEPROM, incl. 896 bit user memory), I-Code SLix-S (2048 bit EEPROM, incl. 1280 bit user memory)

⁴ Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to +50°C, humidity 20% to 80%

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

PRODUCT COMPARISON CHART

Medical and Health



Product Name	Epoxy Tag		Logi Tag 161	LinTag™	SlimFlex Laundry 2G	Piccolino Tag	
Application	Extra thin, printable RFID tags with high mechanical and thermal stability		Mechanical, chemical and temperature resistant tags for harsh environments	Flexible UHF tag for linen or other medical laundry	Flexible small UHF Tag for garments or plastic equipment	Tiny tag for custom housing with high memory capacity and fast anti-collision	
Frequency	125 kHz	860-960 MHz (Worldwide)	13.56 MHz	865 MHz (EU) / 915 MHz (US)	860-960 MHz (Worldwide)	13.56 MHz	
Size	Ø20x1 mm	Ø20 or 30x1 mm	83x25x1 mm	Ø16x2.9mm	max. 50x22x1.6 mm	55x12x2.2 mm	Ø7.5x1 mm, Ø9.5x1 mm Ø9.5x1 mm
Screw Hole	none	None, Ø3.2 mm	3 mm	N/A	N/A	N/A	N/A
Standards / Protocol Support	N/A		EPC C1G2, ISO 18000-6C	ISO 15693, ISO 18000-3, ATEX	EPC C1G2, ISO 18000-6C		ISO 15693, ISO 18000-3 ISO 15693
Chip Type	Hitag S	Unique	Higgs 3	I-Code SLix-L, SLix	G2IL	Higgs 3	I-Code SLix, Vigo F-Mem
Memory ¹	2048 bit RW	64 bit RO	64 bit TID, 96 bit EPC, 512 bit RW	512 bit RW, 1024 bit RW	128 bit EPC, 64 bit TID	96 bit EPC, 64 bit TID, 512 bit RW	1024 bit RW 16 Kbit RW
Anti-collision	Yes	N/A	Yes	Yes	Yes		Yes
Typical Use Environment	Plastic		Cloth	Linen, garments	Cloth, plastic	Depends on finished product	
Reading Distance*	N/A	up to 26.3 ft (8 m)	up to 13.4" (34 cm)	up to 10 ft (3 m)	up to 14.7 ft (4.5 m)	N/A	
Mounting Method	Screw-on, glue or encapsulate		Embed	Stitch, heat-seal, embed	embed, glue	Depends on finished product	
Operating Temperature ²	-40 °C to +85 °C		-40°C to +85°C	-40°C to +85°C		-40°C to +85°C	-20°C to +85°C
Storage Temperature ²	-40 °C to +85 °C		-40°C to +85°C	-40°C to +85°C		-40 °C to +85 °C	
Peak Temperature ²	+140 °C (1x24h)	+160°C (1x10h)	+120 °C (100h), Heat patch +220 °C (30s)	+120 °C (100h), Heat patch +220°C (10s)		N/A	
Housing Material	Epoxy		PPS	Cotton and polyester	TPE	Epoxy	
Chemical and Environmental Resistances ²	Water, IP67 (1m, 1h), mineral oils, ethanol, petrol, fuel	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt Mist, Petroleum, Oils	Water, IP68 (1m, 24h), HCL, bleach, perchlorethylen	Water, oil and all commercial washing detergents, up to 300 washing cycles	Water IP68 (1m, 24h), mineral oil, petroleum, salt mist, vegetable oil, HCL (10%), Bleach (5%); UV light; food compatible	Depends on finished product	
Mechanical Resistances ²	N/A	Vibration IEC 68.2.6, Shock IEC 68.2.29, 100 drops 1.8 m, IEC 62262-1K07	Vibration IEC 68.2.6, shock IEC 68.2.29, 100 drops 1.8 m	Vibration IEC 68.2.6, Shock IEC 68.2.29, 100 drops 1.8 m		N/A	
Axial / Radial Force ²	N/A	1000N (10 sec)	1000N / 1000N (10 sec)	1000N / 1000N (10 sec)		N/A	
Pressure ²	N/A		70 bars (3 min, isostatic)	60 bars (extraction press)	70 bars (5 min, isostatic)	N/A	
Warranty ³	2 years			3 years		2 years	

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.


© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2015-03-30-1dt-tag-products-ct-en PLT-00649

1 Unique (64 bit RO), Q5 (264 bit RW), Hitag S (32 bit RO, 256 bit RW, 2048 bit RW), EM4305 (512 bit RW), I-Code SLix-L (512 bit EEPROM, incl. 256 bit user memory), I-Code SLix (1024 bit EEPROM, incl. 896 bit user memory), I-Code SLix-S (2048 bit EEPROM, incl. 1280 bit user memory), Vigo (1024 bit RW)
2 For further specification details, please see datasheets of the respective product.
3 Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to + 50°C, humidity 20% to 80%

PRODUCT COMPARISON CHART

Commercial Laundry



Product Name	LinTag™	SlimFlex Laundry 2G	Logi Tag 161	Logi Button Tag 162	Logi Tag 120	Logi Tag 160
Application	Flexible UHF tag for linen, garments or other laundry	Flexible small UHF Tag for garments or plastic equipment	Mechanical, chemical and temperature resistant tags for harsh environments such as laundries		Mechanical, chemical and temperature resistant tags for harsh environments such as laundries	
Frequency	865 MHz (EU) / 915 MHz (US)	860-960 MHz (Worldwide)	13.56 MHz		125 kHz	
Size	max. 50x22x1.6 mm	55x12x2.2 mm	Ø16x3 mm	Ø16x2.5 mm	Ø12.4x2 mm	Ø16x3 mm
Standards / Protocol Support	EPC C1G2, ISO 18000-6C		ISO 15693, ISO 18000-3, ATEX		ATEX	
Chip Type¹	G2IL	Higgs 3	I-Code SLIx	I-Code SLIx-L	Hitag S, Q5, Unique	Unique
Memory	128 bit EPC, 64 bit TID	96 bit EPC, 64 bit TID, 512 bit RW	1024 bit RW	512 bit RW	64 Bit RO, 256 bit RW, 264 bit RW, 2048 bit RW	64 bit RO
Anti-collision	Yes		Yes		Hitag S - Yes	N/A
Reading Distance²	up to 10 ft (3 m)	up to 14.7 ft (4.5 m)	Up to 13.4" (34 cm)		N/A	
Mounting Method	Stitch, heat-seal, embed	Embed, glue	Embed in cloth	Sew-on	Embed in cloth	
Operating Temperature³	-40°C to +85°C		-40 °C to +85 °C		-25°C to +85°C	-40°C to +85°C
Storage Temperature³	-40°C to +85°C		-40 °C to +85 °C		-40 °C to +130 °C	-40 °C to +120 °C
Peak Temperature³	+120 °C (100h), Heat patch +220°C (10s)		+120 °C (100h), Heat patch +220°C (30s)	+120 °C (100h)	+160 °C (35h)	
Spin Dryer / Tunnel Finisher³	365° F / 185° C (15 min.)		+175 °C (100 x 10 min)		N/A	+175 °C (100 x 10 min)
Thermal Shock³	+68° to +320° F (+20° to +160° C), 200 x 5 min with 30 sec transition		20°C to +160°C (100 x 5 min)		-20°C to +160°C (100 x 5 min)	
Housing Material	Cotton and polyester	TPE	PPS		PPS with epoxy potting	Epoxy
Chemical and Environmental Resistances³	Water, oil and all commercial washing detergents, up to 300 washing cycles	Water IP68 (1m, 24h), mineral oil, petroleum, salt mist, vegetable oil, HCL (10%), Bleach (5%); UV light; food compatible	Water, IP68 (1m, 24h), Industrial laundry detergent pH 10-11, Neutralizing agent, Hydrogen peroxide 5%, Perchlorethylene		Water IP68 (1m, 24h), saltwater, gasoline, oil, HCL, bleach, formic acid, caustic soda	
Mechanical Resistances³	Vibration IEC 68.2.6, Shock IEC 68.2.29, 100 drops 1.8 m		Vibration IEC 68.2.6, Shock IEC 68.2.29, 100 drops 1.8 m		Vibration IEC 68.2.6, shock IEC 68.2.29	
Axial / Radial Force³	1000N / 1000N (10 sec)		1000N / 1000N (10 sec)	N/A	800N / 500N (10 sec)	1000N / 1000N (10 sec)
Pressure³	60 bars (extraction press)	70 bars (5 min, isostatic)	70 bars (10 sec., isostatic)		70 bars (3 min, isostatic)	
Warranty⁴	3 years		2 years		2 years	

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2015-03-30-ldt-tag-products-ct-en PLT-00649

1 Unique (64 bit RO), Q5 (264 bit RW), Hitag S (256 bit RW, 2048 bit RW), I-Code SLIx-L (512 bit EEPROM, incl. 256 bit user memory), I-Code SLIx (1024 bit EEPROM, incl. 896 bit user memory), I-Code SLIx-S (2048 bit EEPROM, incl. 1280 bit user memory), Vigo (1024 bit RW)
2 Read range is strongly dependent upon multiple parameters including reader, environment and application. HID Global tags are tested and proven to be at the top of their class.

3 For further specification details, please see datasheets of the respective products. Unique, and ICode SLIx have a minimum operating temperature of -40°C, previous chip generations had -25°C.

4 Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to +50°C, humidity 20% to 80%

PRODUCT COMPARISON CHART

Asset Tracking & Logistics



Product Name	Brick Tag Ceramic	InLine Ultra (Weld)	InLine Ultra Slim (Weld)	SlimFlex Tag Standard		Seal Tag		World Tag		Epoxy Tag		
Application	Miniature UHF tags for tracking small metal assets	Robust high performance, general purpose UHF transponder for metal and non metal outdoor use		Flexible, ruggedized tag for industrial / outdoor environments		SlimFlex tag with built-in tamper evident, easy to fix cable tie		Best general use price/performance ratio for indoor asset identification		Printable, engravable tag with high mechanical and thermal stability		
Frequency	865 MHz (EU) / 915 MHz (US)	860 - 960 MHz (Worldwide)		13.56 Mhz	860-960 MHz (Worldwide)	13.56 Mhz	860-960 MHz (Worldwide)	125 kHz		125 kHz	13.56 Mhz	860-960 MHz (Worldwide)
Size	5x5x3, 10x5x3, 23x9x3 mm	97x27x15 mm (Ultra) 105x35x15 mm (Ultra weld)	97x27x9 mm (Ultra) 105x35x9 mm (Ultra weld)	83x25x3 mm	77x25x3 mm (screw) 83x25x3 mm (slot) 87x25x3 mm (cable tie)	85x25x3 mm		Ø20 or 30x2.1 mm	Ø50x2.1 mm	45x30x1.6 mm		83x25x1 mm
Screw Hole		Ø5.2 mm or optional steel ring to weld		2x6 mm (slot)	Ø3 mm (screw) 2x6 mm (slot) Ø7 mm (cable tie)	Cable Tie: 380x6.4x2.15 mm, black		None or Ø3.2 mm	Ø4.2 mm	Ø5 mm		3 mm
Standards / Protocol Support	ISO 18000-6C, EPC C1G2,	ISO 18000-6C, EPC C1G2, ISO 17364, DIN 40050-9		ISO 15693, ISO 18000-3	EPC C1G2, ISO 18000-6C	ISO 15693, ISO 18000-3	EPC C1G2, ISO 18000-6C	N/A		N/A	ISO 15693, ISO 18000-3	EPC C1G2, ISO 18000-6C
Chip Type	Higgs 3	Monza 4QT		I-code SLix	Higgs 3	I-code SLix	Higgs 3	Hitag S, Q5, Titan, Unique		Hitag S, Unique	I-code SLix	Higgs 3
Memory¹	64 bit TID, 96 bit EPC, 512 bit RW	96 bit TID, 128 bit EPC, 512 bit RW		1024 bit RW	64 bit TID, 96 bit EPC, 512 bit RW	1024 bit RW	64 bit TID, 96 bit EPC, 512 bit RW	64 bit RO, 256 bit RW, 264 bit RW, 1024 bit RW, 2048 bit RW		64 bit RO, 256 bit RW	1024 bit RW	64 bit TID, 96 bit EPC, 512 bit RW
Anti-collision	Yes	Yes		Yes			Hitag S - Yes		Hitag S - Yes	Yes		
Reading Distance²	up to 26.2 ft (8 m)	up to 26.2 ft (8 m)	up to 16.4 ft (5 m)	Up to 26.3 ft (8 m)		Up to 26.3 ft (8 m)		N/A		N/A		up to 26.3 ft (8 m)
Typical Use Environment	Metal	Metal, Plastic, Wood, Glass		Plastic, dry wood		Industrial bags, containers		Plastic, glass		Asset tracking or access control & time attendance		Asset Tracking
Mounting Method	Glue	Screw-on or Weld		Glue or screw-on		Integrated cable tie		Glue or screw-on	Screw-on	Screw-on, keyring, chain		screw-on, glue or encapsulate
Operating Temperature³	-40°C to +85°C	-40°C to +80°C		-40°C to +70°C				-25 °C to +70 °C		-25 °C to +85 °C		-40°C to +85°C
Storage Temperature³	-40°C to +85°C	-40°C to +80°C		-40°C to +70°C				-40 °C to +90 °C		-40 °C to +95 °C		-40°C to +85°C
Peak Temperature³		Shock -40° to +85°		Shock -40°C to +70°C				+130 °C (100h)	+100 °C (100h)	+140 °C (1x24h)		+160 °C (1x10h)
Housing Material	Ceramic	PC-ABS		TPE		TPE / Nylon 6.6		PC		Epoxy		
Chemical and Environmental Resistances³	Water, IP68 (2m, 24h), Salt mist, Petroleum, Mineral and vegetable oils	Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), salt mist, petroleum, oils, humidity 70%/80%		Water, IP68 (2m, 24h), Salt mist, Petroleum, Mineral and vegetable oils, UV, Food compatible				N/A		Water, IP67 (1m, 1h), mineral oil, ethanol, petrol, fuel		Water, IP69K (100 bar at 80°C, 30 sek., 16 l/min), Salt Mist, Petroleum, Oils
Mechanical Resistances³	Vibration IEC 68.2.6, Shock IEC 68.2.29	Vibration IEC 68.2.6, shock IEC 68.2.29, impact IEC 62262-IK09		Vibration IEC 68.2.6, Shock IEC 68.2.29, Impact IEC 62262-IK06		Vibration IEC 68.2.6, Shock IEC 68.2.29, Impact IEC 62262-IK06, Cable tie pull resistance >600N		100 drops 1.8m		100 drops 1.8m		Vibration IEC 68.2.6, Shock IEC 68.2.29, 100 drops 1.8 m, IEC 62262-IK07
Axial / Radial Force³		1000N		1000N				500N / 300N (10 sec)	500N / 100N (10 sec)	N/A		1000N (10 sec)
Warranty⁴	2 Years	7 years		2 years				2 years		2 years		

Finding what you need


HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

¹ Unique (64 bit RO), Q5 (264 bit RW), Hitag S (32 bit RO, 256 bit RW, 2048 bit RW), EM4305 (512 bit RW), I-Code SLix-L (512 bit EEPROM, incl. 256 bit user memory), I-Code SLix (1024 bit EEPROM, incl. 896 bit user memory), I-Code SLix-S (2048 bit EEPROM, incl. 1280 bit user memory), Titan (1024 bit RW)
² Read range is strongly dependent upon multiple parameters including reader, environment and application. HID Global tags are tested and proven to be at the top of their class.

³ For further specification details, please see datasheets of the respective products.
⁴ Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to +50°C, humidity 20% to 80%

PRODUCT COMPARISON CHART



Product Name	Glass Tags							Glass Tag Ultra	Clear Disc			Inlays & Labels	Piccolino Tag		E-Unit Rod	E-Unit Disc	E-Module	Brick Tag		
Application	Small size with high chemical resistance provides an ideal solution for long term immersion into liquid or customized enclosures							Glass Tube with up to 35% better read range than standard tube of same size	Clear disc tag for custom housing			Clear inlays or printable labels for NFC or other applications	Tiny tag for custom housing with high memory capacity and fast anti-collision		Embeddable RFID tags - designed for customized enclosure			Tag for car immobilizers, cables and other special applications where small size is required		
Frequency	125 kHz		134.2 kHz			13.56 MHz		134.2 kHz	125 kHz		13.56 MHz	13.56 MHz		134.2 kHz		13.56 MHz		130 kHz	13.56 MHz	
Size	Ø1.4x8 mm	Ø2x12 mm, Ø3x13 mm	Ø4x 22 mm	Ø3x13 mm, Ø4x22 mm	Ø3.85x22.5 mm	Ø2x12 mm, Ø3x13 mm	Ø4x22 mm	Ø2x9 mm, Ø2x12.5 mm	Ø20 or 30x0.6 mm	Ø22 or 30x0.6 mm	Ø25x0.75 mm	Ø29 or 40 mm		Ø7.5x1 mm, Ø9.5x1 mm	Ø9.5x1 mm	Ø1x7 mm, Ø1.8x15 mm	Ø 20, 24, 27, 28 mm or custom	Ø 14.5 x 0.9 mm + hole Ø 6.8 mm	12.1 x 6.1 x 3.0 mm	10.2 x 3 x 2.6 mm
Standards / Protocol Support¹	ATEX		EN14803, ATEX			ISO 15693, ISO 18000-3, ATEX		ATEX			ISO 14443	ISO 14443, NFC		ISO 15693, ISO 18000-3	ISO 15693	ISO 11784, ISO 11785		ISO 15693, ISO 18000-3	N/A	ISO 15693, ISO 18000-3
Chip type	EM 4305	Q5, Hitag S, Unique	Unique	FDX-b BDE	HDX BDE	Vigo	I-Code SLIx	EM 4305	Hitag S, Unique	Q5	MIFARE 1K, DESFire EV1 4K	NTAG 213, Trusted Tag		I-Code SLIx, Vigo	F-Mem	Hitag S, EM4305, other on request		I-Code SLIx	Nova	Vigo
Memory²	512 bit RW	64 bit RO, 256 bit RW, 264 bit RW, 2048 bit RW	64 bit RO	128 bit RO		1664 bit RW	1024 bit RW	512 bit RW	64 bit RO, 256 bit RW, 2048 bit RW	264 bit RW	1-4 kByte RW	144 Byte, 8 KByte		1024 bit RW	16 Kbit RW	256 bit RW, 512 bit RW, 2048 bit RW		1024 bit RW	160 bit RW	1024 bit RW
Anti-collision	N/A	N/A	Hitag S - Yes	N/A		Yes			Hitag S - Yes	N/A	Yes			Yes	Hitag S - Yes		Yes		Yes	
Typical Use Environment	Used in customized housings for non-animal applications								Custom enclosure			Smart poster, non-metal assets	Custom enclosure		Custom enclosure			Custom enclosure		
Mounting Method	External housing								Custom enclosure			Glue	Custom enclosure		Custom enclosure			Custom enclosure		
Operating Temperature³	-25°C to +85°C (-40°C minimum for Unique and Q5 chip)								-20 °C to +60 °C			-20°C to +70° C	-40 °C to +85 °C	-20 to +85°C	-25 °C to + 60 °C		-25 °C to + 85 °C	-40°C to +90°C	-25°C to +70°C	
Storage Temperature³	-40 °C to +90 °C								-20 °C to +60 °C			-20°C to +70° C	-40 °C to +85 °C		-40 °C to + 60 °C		-40 °C to + 120 °C	-40°C to +120°C	-25°C to +70°C	
Peak Temperature³	+120 °C (100h) +140 °C (10h)								N/A				N/A		N/A			N/A		
Housing Material	Glass							Bio Glass	Polyethylen + Polyester (outside)			PET (inlay), Paper (label)	Epoxy		N/A	FR4 + Epoxy glob top	Epoxy	ABS/Epoxy Potting		
Chemical and Environmental Resistances³	Water, IP68 (1m, 24 h), saltwater, alcohol, HCL, fuel, ammonia								Depends on finished product			Water, IP67 (1m, 1h)	Water, IP67 (1m, 1h)		Depends on finished product			Water IP68, saltwater, gasoline, oil, HCL, bleach, formic acid, caustic soda		
Mechanical Resistances³	Vibration IEC 68.2.6, shock IEC 68.2.29								Depends on finished product			Vibration IEC 68.2.6, Shock IEC 68.2.29	Depends on finished product		Depends on finished product		Vibration IEC 68.2.6, Shock IEC 68.2.29	Vibration IEC 68.2.6, Shock IEC 68.2.29		
Warranty⁴	2 years								2 years			2 Years	2 years		2 years			2 Years		

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2015-03-30-ldt-tag-products-ct-en-PLT-00649

1 ISO 11784, ISO 11785 for Hitag S and EM4305 chip only
 2 Unique (64 bit RO), Q5 (264 bit RW), Hitag S (32 bit RO, 256 bit RW, 2048 bit RW), Titan (1024 bit RW), EM4305 (512 bit RW), I-Code SLIx (1024 bit EEPROM, incl. 896 bit user memory), Vigo (1024 or 1664 bit RW), NTAG 213 (144 Byte RW), Trusted Tag (8 KB RW)
 3 For further specification details, please see datasheets of the respective products
 4 Warranty: Storage condition must not exceed specification for temperature, chemical, mechanical, electrical condition, storage from -25°C to + 50°C, humidity 20% to 80%

Industry & Logistics Readers



Product Name	Multi-Tag
Product Type	Reader Core
Base Model Number	701800013
Dimensions	25.5 mm x 30.5 mm x 6 mm
Power Supply	5VDC +/- 10% Regulated
Power Supply Connector	N/A
Antenna Support	Single External
External Antenna Connector	N/A
RF Transmit Frequency	125 kHz , 134.2 kHz
Supported Standards	ISO 11784, ISO 11785 ISO 18000-2
Supported Tag-IC's	Hitag 1, Hitag 2, Hitag S, Q5 EM4X02, EM4X05 (ISO FDX B), EM4X50 TI-RFID systems 134.2 kHz 64Bit R/O, TI-RFID systems 134.2 kHz 64Bit R/W TI-RFID systems 134.2 kHz 1088Bit multipage
Communication Interface	CMOS-TTL Serial Interface 9600Bits/s to 115kBits/s, 8, N, 1
Global Certification	RoHS, WEEE
Software	DLL (C++) & Reader Utility Program
Warranty	6 Months

Finding what you need

HID Global has many more products to offer than fit on this page. Please refer to hidglobal.com or contact an HID representative for further assistance in evaluating these tags or selecting a solution that best fits your particular requirements.

© 2015 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, and the Chain Design, are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2015-03-30-ldt-tag-products-ct-en PLT-00649