

# Multi-ISO Embedded Reader Platform



## 13.56 MHZ HF CONTACTLESS READER MODULES

- **Flexible and interoperable** – Single integration enables PC connected, embedded and mobile solutions; supports broad portfolio of contactless card technologies
- **Fast, efficient, secure** – Up to 848 kBits data transfer speed, optimized data throughput between card and host. Integrated SAM support maximizes security between card, reader and host
- **Integration-friendly** – Supports major tag IC features allowing for easy system integration; employs OS-independent interfacing concept

The family of 13.56 MHz Multi-ISO Reader Boards supports one of the broadest ranges of transmission protocols and transponder ICs available on the market.

Designed to meet the requirements of both secure personal identity verification and supply chain management applications, the Multi-ISO Embedded Reader Platform is ideal for access control, as well as Automatic Fare Collection (AFC), ticketing, vending and mobile solutions.


Featuring integrated SAM support that enables state-of-the-art security, the interoperable reader platform supports a wide range of industry standards, including ISO 14443 A/B, ISO 15693, ISO 18000-3.

Multi-ISO reader boards are also optimized for maximum data throughput times on both the air and serial interface, and are available with a variety of antenna size options for easy integration in virtually any mobile or compact application.

### KEY FEATURES

- Easy to integrate with full feature support of most transponder ICs
- Full access to data of contactless memory, high security and micro-controller-based cards
- Compact reader board and antenna design is ideal for virtually any size-constrained application
- Fast reading with up to 848 kBit/s data rate on air interface
- Future-proof through field upgradeable firmware
- Key management
- Enhanced anti-collision algorithm for multi-card handling
- Connectivity with the support of TTL, RS232

## SPECIFICATIONS

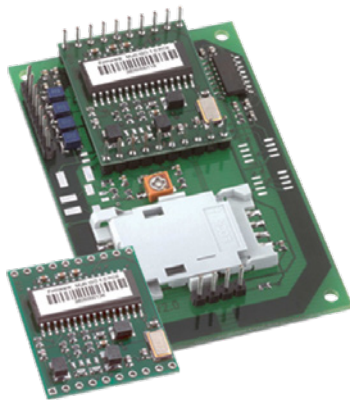

	Reader Core	Reader Board RS232
<b>Base Model Number</b>	0701800159-1	0701800160
<b>Operating Frequency</b>	13.56 MHz	
<b>Supported Standards</b>	ISO14443A, ISO14443B, ISO 15693, ISO 18000-3, NFC enabled, ICODE	
<b>Supported Chip Types</b>	MIFARE™ Standard / EV1, MIFARE 4k, MIFARE Plus, MIFARE Pro, MIFARE Ultralight, MIFARE Ultralight C, MIFARE DESFire™, MIFARE DESFire EV1 /EV2, MIFARE SmartMX, NTAG 2xx, I-CODE SLI(x) (SL2 ICS 20), I-CODE EPC (SL2 ICS 10), I-CODE UID, (SL2 ICS 11), I-CODE, NFC (Reader To Tag Mode) SLE 55Rxx, SRF55VxxP +S, SLE 66CL160S, SLE 66CLX320P, SR176, SR1X4K, LRI 64, LRI 512, EM4135, KSW Temp Sens™ Tag-it™ HF-I Standard, Tag-it™ HF-I Pro, Jewel Tag, Sharp B, ISO14443A Tags, ISO14443B Tags, ISO15693 Tags, ISO18000-3 Tags	
<b>Host Communication</b>	Point-to-Point	
<b>Communications Interface</b>	CMOS-TTL	RS232
<b>Communications Protocol</b>	Specific ASCII or Binary Protocol	
<b>Communications Parameter</b>	9600 Bit/s to 460 kBit/s, 8, N, 1	9600 Bit/s to 115 kBit/s, 8, N, 1
<b>Firmware Boot-Loader</b>	Supported via Serial Interface	
<b>S/W Driver</b>	Virtual COM port, API - DLL (MSVC++)	
<b>Power Supply</b>	5 VDC ± 10% regulated	
<b>Power Consumption</b>	90 - 200 mA depending on antenna (without connected SAM) < 10 µA at power down mode	< 150 mA (without SAM) < 10 mA at power down mode
<b>Reading distance</b>	Up to 90 mm / 3.54", depending on tag and antenna	Up to 75 mm / 2.95", depending on tag
<b>RF Transmission Speed</b>	Up to 848 kBit/s	
<b>Antenna</b>	External	Integrated
<b>Input/Output Connector</b>	2 status indicator LED lines SAM Interface	2 status indicator LED lines SAM Socket
<b>Size</b>	25.5 x 30.0 x 4.8 mm ± (L/W) 0.5 (H) 1.0 / 1.00" x 1.18" x 0.19" ± (L/W) 0.02" (H) 0.04"	70.0 x 45.0 x 12.1 mm ± 1.0 mm / 2.76 x 1.77" x 0.48" ± 0.04"
<b>Weight</b>	5g ± 5% / 0.01 lb ± 5%	17g ± 10% / 0.04 lb ± 10%
<b>Operating Temperature</b>	-20°C to + 80°C / -4°F to +176°F	
<b>Storage Temperature</b>	-40°C to + 85°C / -40°F to +185°F	
<b>Firmware Version</b>	1.2.5	
<b>Approvals/Compliances</b>	RoHS compliant	ETS 300-330, CE, FCC part 15, RoHS compliant, ISO 14443 1-4
<b>MTBF</b>	3.000.000 h	200.000h



[hidglobal.com](http://hidglobal.com)

North America: +1 512 776 9000  
Toll Free: 1 800 237 7769  
Europe, Middle East, Africa: +44 1440 714 850  
Asia Pacific: +852 3160 9800  
Latin America: +52 55 5081 1650

An ASSA ABLOY Group brand

