




## OMNIKEY® 5321 CLi USB Reader

### CONTACTLESS USB SMART CARD READER

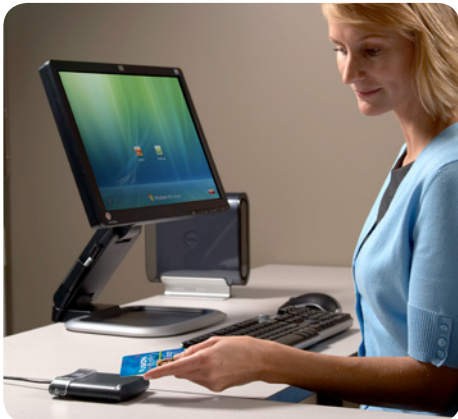

- **Versatile Desktop Applications** – Ideal for end-user environments using contactless HID iCLASS® technology
- **Fast Contactless Transmission** – Supports fastest ISO standard transmission modes
- **Designed for User Convenience** – Housing design is optimized for advanced contactless applications
- **Readily compliant** – Seamless integration with HID on the Desktop™ and other applications

The OMNIKEY® 5321 CLi USB smart card reader represents the ideal contactless HID iCLASS® reader in a convenient desktop device. Reading and writing to any contactless HID iCLASS card, the device economically supports desktop clients where contactless iCLASS technology is used.

Utilizing contactless smart card technology for PC-linked applications, the OMNIKEY 5321 CLi allows users to experience the convenience, speed and security of HID iCLASS contactless technology for applications such as iCLASS on the Desktop™.

The OMNIKEY 5321 series readers work seamlessly with iCLASS-enabled logical access applications in combination with naviGO™ software, which is part of the HID on the Desktop solution. naviGO is a cost-effective solution that simplifies deployment of strong authentication managing and automating the life cycle of strong authentication user credentials on iCLASS smart cards. Designed to enable HID on the Desktop™, naviGO allows card holders to manage their own enrollment, PIN management and knowledge-based authentication through a self-service browser based application.

For actual driver downloads please visit [hidglobal.com/omnikey](http://hidglobal.com/omnikey)

### FEATURES:

- Secure authentication device for logging on to PC or IT infrastructure
- Does not require organizations using iCLASS to re-badge, issue a new token or make any changes to their physical access control system
- Easy to install and can be used with naviGO software to converge access from the door to the logging onto PCs
- Compliant with all relevant safety and environmental standards, including CE, FCC, UL, RoHS and WEEE



### SPECIFICATIONS

<b>Base Model Number</b>	OMNIKEY® 5321 CLI
<b>Dimensions</b>	3.78" x 3.07" x 0.31" (115 x 96.5 x 25.5 mm)
<b>Weight</b>	Approx. 5.64 oz (160 g)
<b>Power Supply</b>	Bus powered
<b>Operating Temperature</b>	32-131 °F (0-55 °C)
<b>Operating Humidity</b>	10-90% rH
<b>HOST INTERFACE</b>	
<b>Host Interface</b>	USB 2.0 (also compliant with USB 1.1)
<b>Transmission Speed</b>	12 Mbps (USB 2.0 full speed)
<b>CONTACTLESS SMART CARD INTERFACE</b>	
<b>Protocols</b>	HID iCLASS*
<b>Driver Support</b>	Windows® XP / Vista / Windows 7 / Windows 8, 2003 / 2008 Server, Windows® CE 5.0 / CE.NET / CE 6.0 (depending on hardware), Linux® and Mac® OS X
<b>Status Indicator</b>	Dual color LED (green = ready, red = busy)
<b>Color</b>	Gray
<b>Options</b>	Customer-specific logo, label and colors: available upon request
<b>Composition</b>	ABS
<b>Meantime Between Failure (MTBF)</b>	500,000 hours
<b>Compliance / Certification</b>	Microsoft® WHQL <sup>1</sup> , USB 2.0 (USB 1.1 compatible)
<b>Safety / Environmental</b>	CE, FCC, UL, RoHS, WEEE
<b>Warranty</b>	Two-year manufacturer's warranty. (For drivers, see complete lifetime support policy.)

<sup>1</sup> = Windows® Hardware Quality Lab



North America: +1 949 732 2000  
 Toll Free: 1 800 237 7769  
 Europe, Middle East, Africa: +44 1440 714 850  
 Asia Pacific: +852 3160 9800  
 Latin America: +52 55 5081 1650

[hidglobal.com](http://hidglobal.com)

### ASSA ABLOY

An ASSA ABLOY Group brand

© 2013 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, OMNIKEY, iCLASS on the Desktop, HID on the Desktop, iCLASS and naviGO are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.  
 2013-04-15-omnikey-5321-cli-usb-reader-en-ds